



KIF-P2010TG




KIF-P2010T

Benefits

- 1.Environmentally-friendly R-290 refrigerant that has zero ozone depletion.
- 2.Operating environment class:25°C/60%R.H.
- 3.Electronic temperature controller.
- 4.Dual temperature, chiller/freezer one- touch switching
- 5Automatic defrost.

Standard Features

- 1.Exterior painted steel and interior aluminum.
- 2.Copper fine pipe evaporator fan cooling.
- 3.CFC-free insulation
- 4.Leg levelers.
- 5.All models with front glass.
- 6.Dual temperature design to meet all foods temperature requirements.

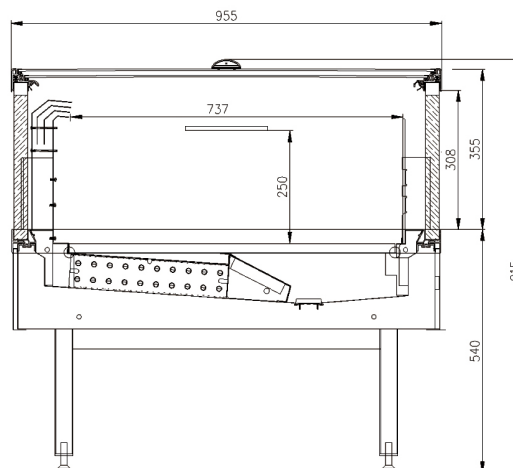

Optional Features

- 1.Exterior color option.
- 2.High duty wheels with brake.
- 3.Optional for top cover.
- 4.Joinable to make a line.

Model	External Dimension(mm)			Temperature Range (°C)	Effective Volume(L)	Display Area(M ²)	Input power (w)	Refrigerant	40' Container load(pcs)
	Length	Width	Height						
KIF-P1010T	1000	995	935	≤-18/-1~5	172	1.51	850	R290	44
KIF-P1510T	1500	995	935	≤-18/-1~5	265	2.09	1350	R290	28
KIF-P2010T	2000	995	935	≤-18/-1~5	360	2.47	1430	R290	21
KIF-P2510T	2500	995	935	≤-18/-1~5	455	2.85	1580	R290	16
KIF-P1010TG	1000	995	935	≤-18/-1~5	172	1.51	850	R290	44
KIF-P1510TG	1500	995	935	≤-18/-1~5	265	2.09	1350	R290	28
KIF-P2010TG	2000	995	935	≤-18/-1~5	360	2.47	1430	R290	21
KIF-P2510TG	2500	995	935	≤-18/-1~5	455	2.85	1580	R290	16