




KMD-P1370EGA

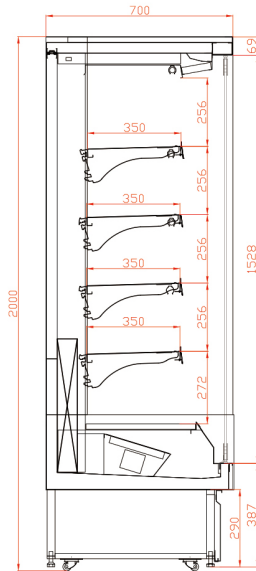

MUTIDECK-PLUG IN
-HINGED GLASS DOOR

Benefits

1. Single tempered glass door
2. Environmentally friendly R290 hydrocarbon refrigerant that has zero ozone depletion potential
3. Operating environment class: 25°C/60%R.H.
4. Pull out condensing unit slides out for easy cleaning and maintenance.
5. Frameless glass doors for great product visibility
6. The available low front versions (700 mm)

Standard Features

1. Black & White exterior and interior color.
2. Shelves : 350/450mm in depth.
3. Hi-humidity condensate pan with PTC heater
4. LED interior cabinet lighting and under shelf LED interior lighting.
5. CFC-free insulation
6. Leg levelers
7. Glass end walls as standard

Optional Features

1. Additional shelves.
2. Stainless steel exterior & interior or choice of exterior & interior colors.
3. Solid end walls with mirrored interior.
4. High duty wheels with brakes.
5. Optional for glass shelves.

Model	External Dimension(mm)			Temperature Range (°C)	Effective Volume(L)	Display Area(M²)	Input power (w)	Refrigerant	40' Container load(pcs)
	Length	Width	Height						
KMD-P1070EGA	1000	700	2000	-1~7	440	1.6	264	R290	33
KMD-P1370EGA	1315	700	2000	-1~7	595	1.9	357	R290	25
KMD-P1570EGA	1520	700	2000	-1~7	693	2.1	416	R290	21
KMD-P2070EGA	1940	700	2000	-1~7	893	2.5	535	R290	16
KMD-P2670EGA	2565	700	2000	-1~7	1190	3	714	R290	12
KMD-P1080EGA	1000	800	2000	-1~7	560	1.8	336	R290	28
KMD-P1380EGA	1315	800	2000	-1~7	750	2.1	450	R290	22
KMD-P1580EGA	1520	800	2000	-1~7	873	2.3	523	R290	15
KMD-P2080EGA	1940	800	2000	-1~7	1125	2.7	675	R290	14
KMD-P2680EGA	2565	800	2000	-1~7	1500	3.4	900	R290	8

