

Benefits



- 1.Environmentally-friendly R-290 refrigerant that has zero ozone depletion.
- 2.Operating environment class:25°C/60%R.H.
- 3.Flate glass design.
- 4.Electronic temperature controller.
- 5.LED light mounted on top.
- 6.Easy to install , "plug and play" solution

Standard Features

- 1.Worktop in stainless steel.
- 2.Exterior and interior steel sheet preapainted.
- 3.Evaporator is epoxy coated to eliminate the potential of corrosion.
- 4.Front anti-condensation fan.
- 5.CFC-free insulation
- 6.Leg levelers.

Optional Features

- 1.Stainless steel exterior&interior or choice of exterior&interior colors.
- 2.High duty wheels with brake.
- 3.Worktop in Marble.
- 4.Joinable to make a line or different angle.
- 5.Option for Front anti-condensation fan .
- 6.Refrigerated under storage with doors.

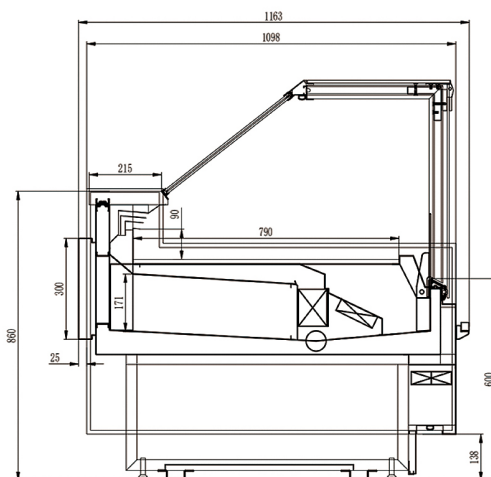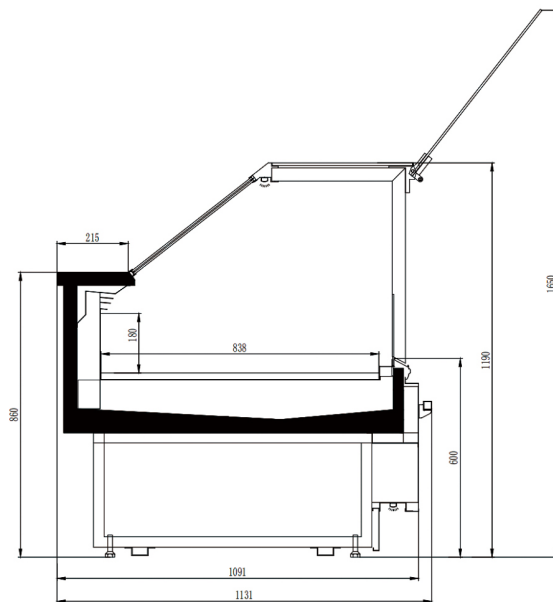

Model	External Dimension(mm)			Temperature Range (°C)	Effective Volume(L)	Display Area(M2)	Input power (w)	Refrigerant	40' Container load(pcs)
	Length	Width	Height						
KSC-P1312SCC	1330	1131	1190	-1~5	173	1.12	665	R290	18
KSC-P2012SCC	1940	1131	1190	-1~5	259	1.6	710	R290	18
KSC-P2612SCC	2580	1131	1190	-1~5	346	2.08	720	R290	8
KSC-P3812SCC	3830	1131	1190	-1~5	519	3.05	1160	R290	6
KSC-P1310SCC	1330	951	1190	-1~5	146	0.94	665	R290	32
KSC-P2010SCC	1940	951	1190	-1~5	220	1.35	710	R290	28
KSC-P2610SCC	2580	951	1190	-1~5	295	1.75	720	R290	24
KSC-P3810SCC	3830	951	1190	-1~5	439	2.56	1160	R290	16